


**SECTION A-A**

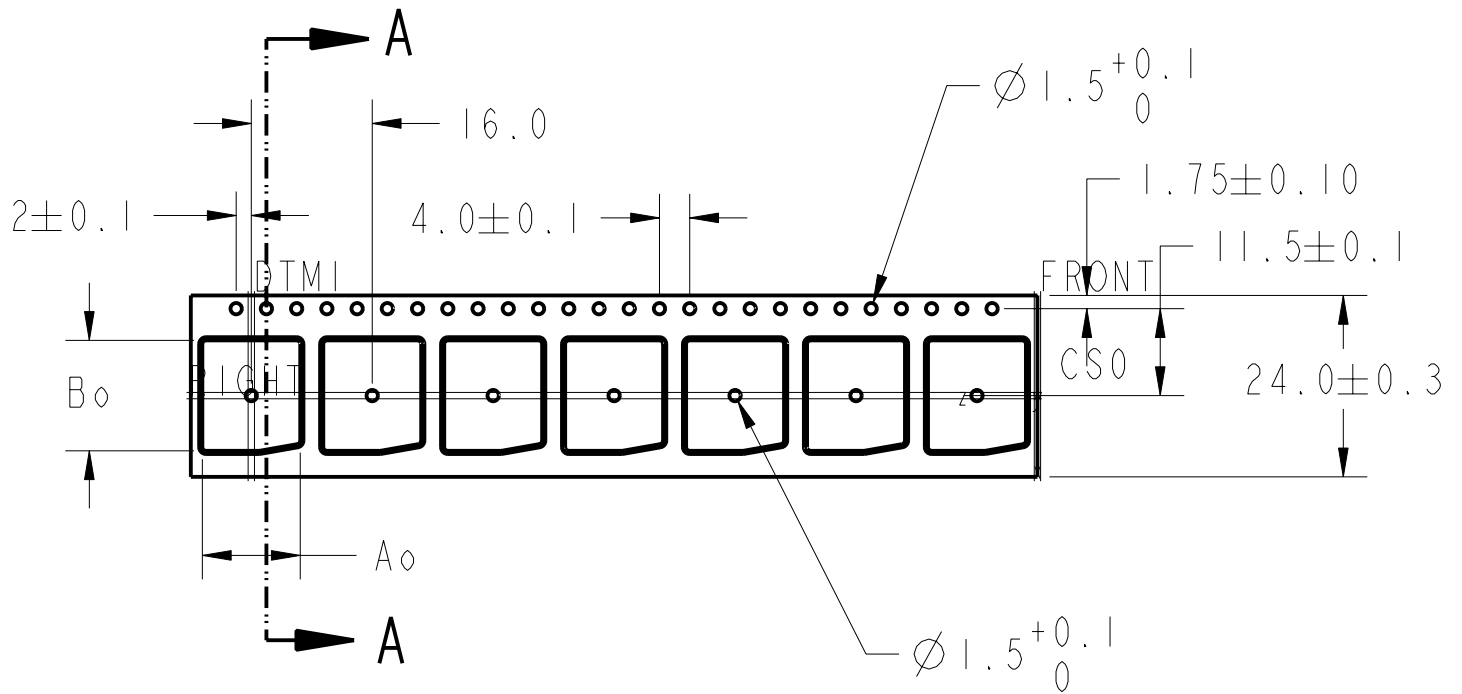

**NOTES:**

1. EIA-481 STANDARDS APPLY
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE.
3. DIE# WD20412.

Ao	12.95 [.510]
Bo	14.61 [.575]
Ko	3.45 [.136]

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY J. LAGE	DATE 16-Oct-02		<b>A</b> SIZE APPD. BY
±	CHECKED BY .	DATE .		
±	DESIGNED BY .	DATE .		
±	APPROVED BY .	DATE .		
±	<b>--- CONFIDENTIALITY ---</b> THIS DRAWING IS HEREBY DESIGNATED AS CONFIDENTIAL. INFORMATION ON IT IS PROPRIETARY <b>Accutech</b> AND SHALL NOT BE USED OR DISCLOSED TO THIRD PERSONS EXCEPT IN CONFORMITY WITH <b>Accutech</b> WRITTEN CONSENT.		THIRD ANGLE PROJECTION	85395 ECO NO. REV. <b>B</b>
DRAFT UNLESS NOTED: 0.5°	<b>UNLESS OTHERWISE NOTED:</b> ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994 AND <b>Accutech</b> DRAFTING STANDARD NO. 1.0000.		TITLE/DESCRIPTION TAPE - CARR 50-217 24mm	
∠ ± 0.5°	ALL DIMENSIONS ARE IN MM		PART NO./I.D. NO. CT-9924H-114	
SCALE: NTS	SHEET OF 1		MATERIAL/MOLD NO. STATIC DISSIPATIVE POLYSTYRENE	
			DRAWING NO. 01-019066	