


SECTION A-A

NOTES:

1. EIA-481 STANDARDS APPLY
2. MATERIAL: STATIC DISSIPATIVE STYRENE
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
4. DIE # WD20420

A_p	= 22.95MM (0.904)
B_p	= 24.27MM (0.956)
K_p	= 2.45MM (0.096)

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY K. WAGNER	DATE 02-Dec-02
±	CHECKED BY .	DATE .
±	DESIGNED BY .	DATE .
±	APPROVED BY .	DATE .
±	--- CONFIDENTIALITY ---	
DRAFT UNLESS NOTED: 0.5°	THIS DRAWING IS HEREBY DESIGNATED AS CONFIDENTIAL. INFORMATION ON IT IS PROPRIETARY Accutech AND SHALL NOT BE USED OR DISCLOSED TO THIRD PERSONS EXCEPT IN CONFORMITY WITH Accutech WRITTEN CONSENT.	
$\nabla \pm 0.5^\circ$	UNLESS OTHERWISE NOTED: ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994 AND Accutech DRAFTING STANDARD NO. 1.0000.	
ALL DIMENSIONS ARE IN MM	SCALE: NTS	
	SHEET OF	

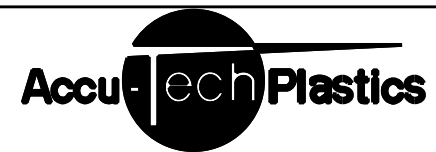

THIRD ANGLE PROJECTION	
TITLE/DESCRIPTION	TAPE - CARR R2224 T-R 44mm
PART NO./I.D. NO.	CT-9944H-134
MATERIAL/MOLD NO.	STATIC DISSIPATIVE POLYSTYRENE
DRAWING NO.	01-019727

A SIZE
 APPD. BY
 X-271
 ECO NO.
 REV.
A