
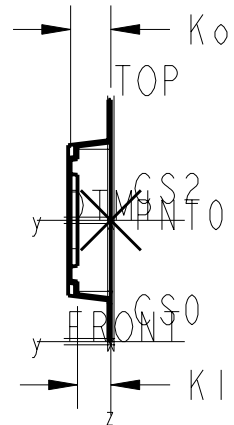


DETAIL A
SCALE 4.000

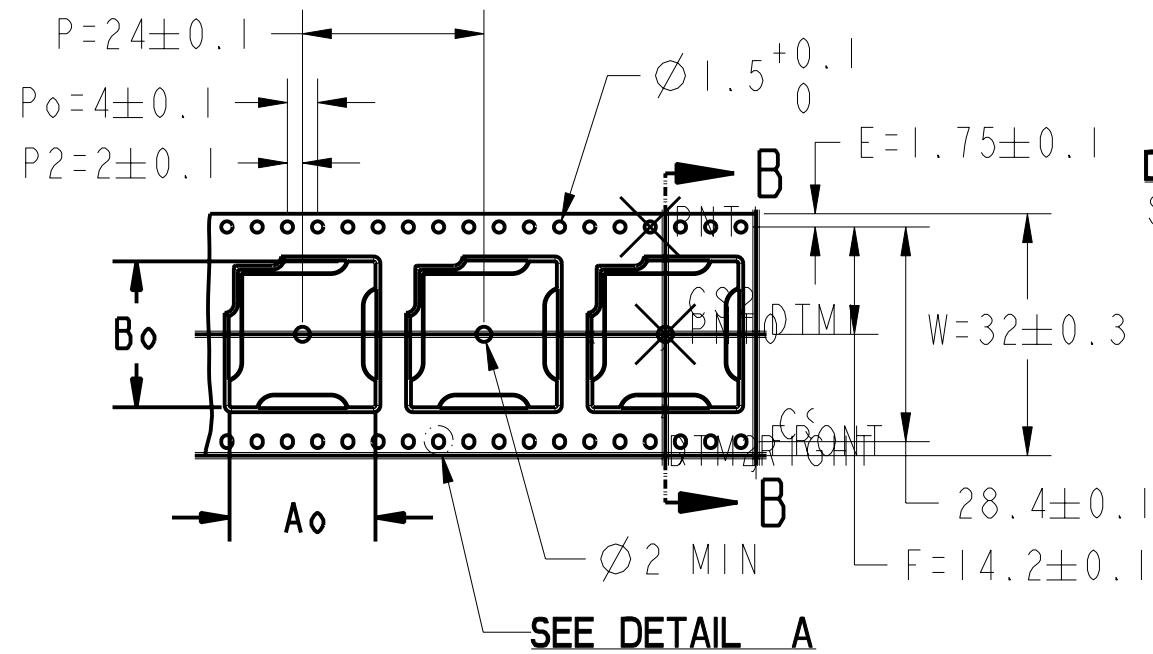

SECTION B-B

NOTES:

1. EIA-481 STANDARDS APPLY
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. $P10 = P0 \times 10$
4. DIE # WD20459

A ₀	19.300 [0.760]
B ₀	19.300 [0.760]
K ₀	5.320 [0.209]
K ₁	4.410 [0.174]

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY K. WAGNER	DATE 27-Feb-03
±	CHECKED BY .	DATE .
±	DESIGNED BY .	DATE .
±	APPROVED BY .	DATE .
±	--- CONFIDENTIALITY ---	
DRAFT UNLESS NOTED: 0.5°	THIS DRAWING IS HEREBY DESIGNATED AS CONFIDENTIAL. INFORMATION ON IT IS PROPRIETARY Accutech AND SHALL NOT BE USED OR DISCLOSED TO THIRD PERSONS EXCEPT IN CONFORMITY WITH Accutech WRITTEN CONSENT.	
± 0.5°	UNLESS OTHERWISE NOTED: ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994 AND Accutech DRAFTING STANDARD NO. 1.0000.	
ALL DIMENSIONS ARE IN MM		
SCALE: NTS		
SHEET OF		

THIRD ANGLE PROJECTION	
TITLE/DESCRIPTION TAPE - CARR 5051-58 32mm	
PART NO./I.D. NO.	CT00171-G-A0038
MATERIAL/MOLD NO.	STATIC DISSIPATIVE POLYSTYRENE
DRAWING NO.	01-020954

A SIZE
 APPD. BY
 X-1402
 ECO NO.
 REV.
B