

NOTES:

1. EIA-481 STANDARDS APPLY
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. $P_{10} = P_o \times 10$

4. NUMBER IDENTIFIES PRODUCT CONFIGURATION. FOR COMPLETE ORDER NUMBER TO INCLUDE MATERIAL TYPE AND QUANTITY PER REEL, CONTACT CUSTOMER SERVICE.

A_o	23.35 ± 0.10 [0.919 ± .004]
B_o	23.35 ± 0.10 [0.919 ± .004]
K_o	6.19 ± 0.10 [0.244 ± .004]
K_1	3.66 ± 0.10 [0.144 ± .004]


IMPORTANT NOTICE:

DRAWING DOES NOT CONTAIN ALL DIMENSIONS, SPECIFICATIONS, AND TOLERANCES. THIS DRAWING IS INTENDED TO ASSIST THE CUSTOMER IN DESIGNING AN INTERFACE MODULE BETWEEN THE CUSTOMER'S EQUIPMENT AND **Accutech** PRODUCT/EQUIPMENT. ALL DIMENSIONS AND TOLERANCES IF DEFINED ARE PER ASME Y14.5M - 1994

NOTE: ALL DIMENSIONS ARE CONSIDERED CRITICAL.

ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]	DRAWN BY K. ANDERSON	DATE 09-Dec-04
--	-------------------------	-------------------

DO NOT SCALE SHEET 1 OF 1

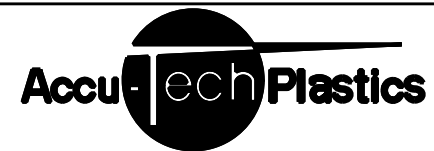

THIRD ANGLE PROJECTION

DESCRIPTION
TAPE - CARR
SK9201-A 44mm

PART NO.
CT00434

MATERIAL
SEE NOTE

DRAWING NO.
01-029841

A SIZE

61801-X-10819

ECO NO.
REV.

B